





1. Complete machine




2, take off the 4 feet of the bottom

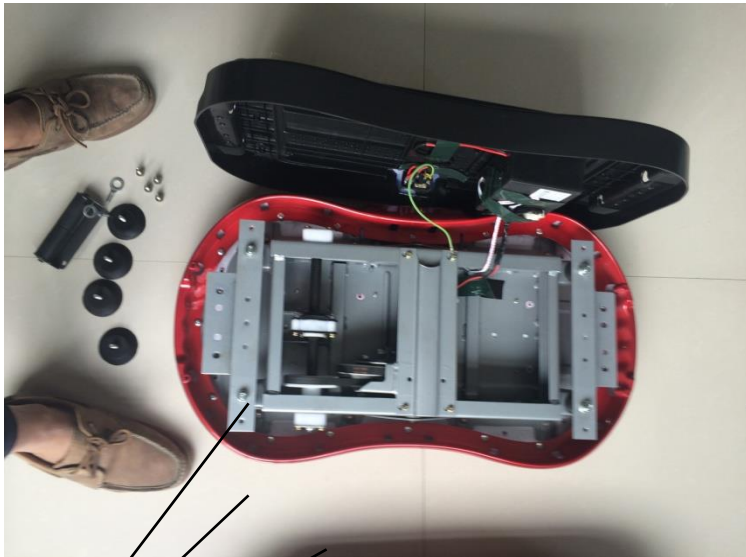

3. take off all the screws of bottom

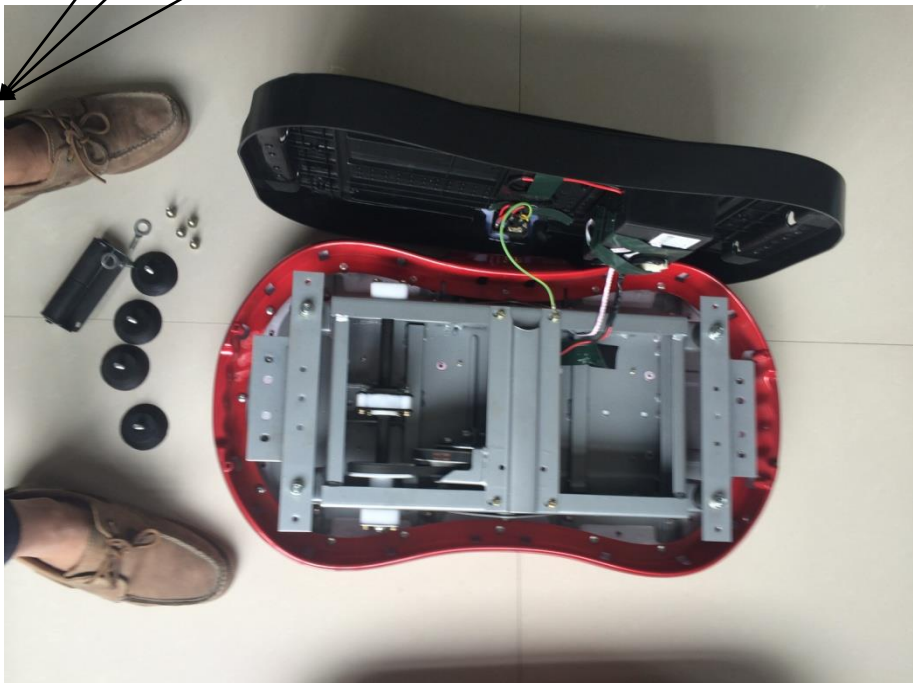

(display)

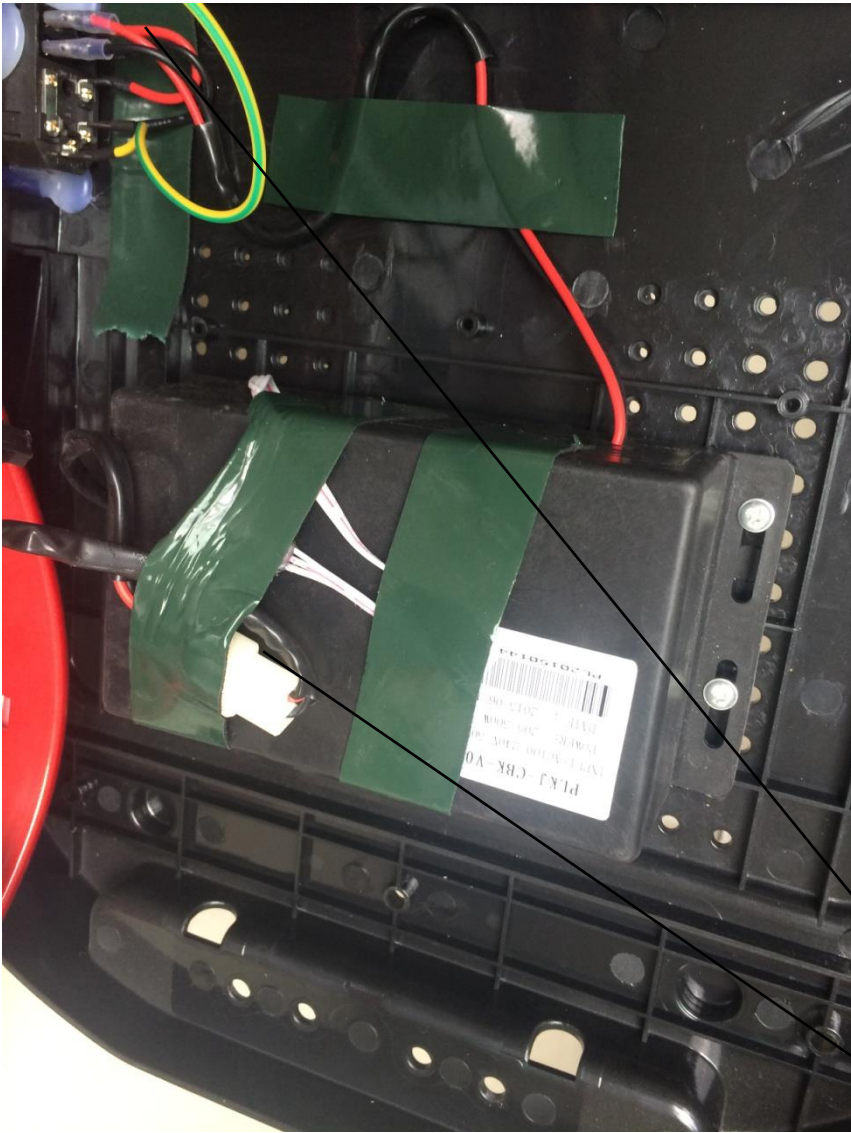

4. check wire connection, make

sure no loose